LIQUID TOOLING

LIQUID PARTS

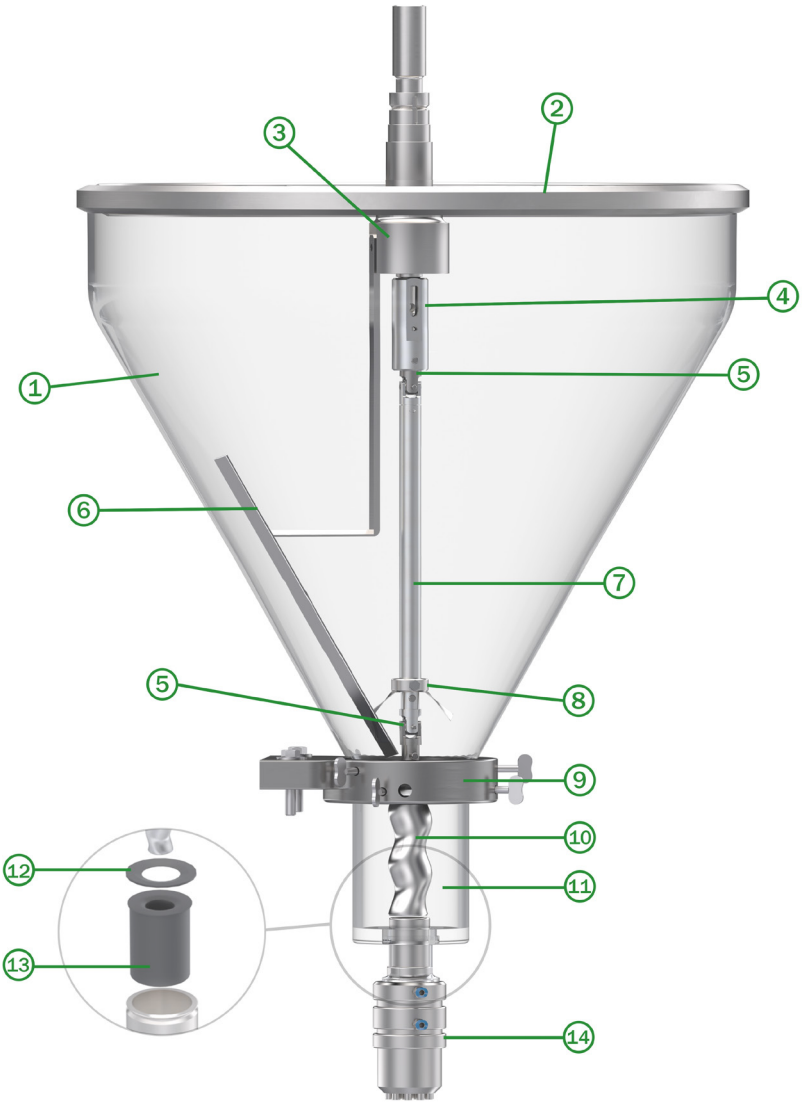

LIQUID APPLICATIONS

Water	**Liquid Detergents**
Fruit Juice	**Food Coloring**
Alcohol	**Cough Syrup**
Cologne	**Kerosene**

LIQUID BREAKDOWN

Liquid products such as creams, oils, gels, and more can be dispensed with your filler using a shaft, U-joints, pump rotor, stator, and pump housings installed in place of the auger shaft, auger, and funnel.

There are a variety of nozzles available for liquid applications, including A and F type Cream nozzles, shower head, solvent, and universal nozzle assemblies. For best results, there should be a 1/4" clearance between the pump and housing. Depending on application, your assembly may additionally need a plug rod cutoff (available in four different sizes) to prevent drip.

LIQUID TOOLING KEY

1. 22" Hopper
2. Hopper Cover
3. Spindle
4. Pump Shaft Hub
5. U Joint
6. Slow Speed Agitation
7. Pump Shaft
8. A3 High Speed Agitation
9. Coupling
10. Rotor
11. Pump Housing
12. Retaining Ring
13. Stator
14. F Type Cream Nozzle